

NANO-SURFACTANT HUFF AND PUFF OPTIMATIZATION IN MARGINAL X FIELD USING COMMERCIAL SIMULATOR

*(Studi Optimasi Nano-Surfactant Huff n Puff
pada Lapangan Marginal X dengan Simulator Komersial)*

Ariel Paramastya, Steven Chandra, Wijoyo Niti Daton, and Sudjati Rachmat

Petroleum Engineering Departmen, Institut Teknologi Bandung
Basic Science B Building, 4th Floor, Ganesha 10 Street, Lb. Siliwangi,
Kecamatan Coblong, Kota Bandung, Jawa Barat 40132
Telp.: (022) 2506282
Email: stevenchandra010@gmail.com; steven@tm.itb.ac.id

First Registered on May, 28th 2019; Received after Correction on June, 5th 2019
Publication Approval on: August 30th2019

ABSTRAK

Optimalisasi ekonomi dari sebuah proyek minyak dan gas adalah kewajiban yang harus dilakukan untuk meningkatkan laba secara keseluruhan, apakah lapangan tersebut masih layak secara ekonomi atau lapangan telah melampaui batas ekonominya. Dalam hal ini, bidang marginal dipilih untuk penelitian ini. Dalam sejarah produksi lapangan marginal X, metode EOR telah digunakan untuk mendorong laju produksi. Namun, metode EOR skala penuh mungkin tidak menguntungkan karena jumlah sumber daya yang diperlukan untuk melakukannya. Oleh karena itu, metode Huff dan Puff adalah teknik EOR yang diusulkan untuk meningkatkan perolehan dalam kasus sumur tunggal. Metode Huff and Puff adalah metode EOR di mana sumur tunggal berfungsi sebagai produsen dan injektor. Teknik Huff and Puff: (1) Sumur diinjeksi dengan fluida injeksi tertentu (2) sumur ditutup untuk membiarkan fluida “bereaksi” di reservoir selama beberapa waktu, dan (3) sumur dibuka dan fluida reservoir berproduksi. fluida injeksi (dalam hal ini, nano-surfaktan) akan diteliti dengan hipotesis mampu mengurangi tegangan antarmuka antara minyak dan batuan, sehingga meningkatkan perolehan minyak. Dalam penelitian ini, penerapan metode Huff dan Puff menggunakan Nanopartikel (NP) sebagai cairan yang diinjeksikan, sebagai metode meningkatkan perolehan minyak disajikan dalam studi kasus lapangan di Sumatera Selatan. Studi ini menghasilkan bahwa metode tersebut menghasilkan peningkatan perolehan minyak yang optimal di mana aspek ekonomi mendapatkan lebih banyak keuntungan, dan oleh karena itu dianggap layak untuk diterapkan di lapangan.

Kata Kunci: Huff n Puff, nano surfactant, tegangan permukaan

ABSTRACT

Economic optimization of an oil and gas project is an obligation that has to be done to increase overall profit, whether the field is still economically feasible or the field has surpassed its economic limit. In this case, a marginal field was chosen for the study. In this marginal field EOR methods have been used to boost the production rate. However, a full scale EOR method might not be profitable due to the amount of resources that is required to do it. Alternatively, Huff and Puff method is an EOR technique that is reasonable in the scope of single well. The Huff and Puff method is an EOR method where a single well serves as both a producer and an injector. The technique of Huff and Puff: (1) The well is injected with designed injection fluid, (2) the well is shut to let the fluid to “soak” in the reservoir for some time, and (3) the well is opened and reservoir fluids are allowed to be produced. The injection fluid (in this case, nano-surfactant) is hypothesized to reduce interfacial tension between the oil and rock, thus improving the oil recovery. In this study, the application of Huff and Puff method using Nanoparticles (NPs) as the injected fluid, as a method of improving oil recovery is presented in a case study of a field in South Sumatra. The study resulted that said method yields an optimum Incremental Oil Production (IOP) in which the economic aspect gain more profit, and therefore it is considered feasible to be applied in the field.

Kata Kunci: Huff n Puff, Nano Surfactant, Tegangan Permukaan

How to cite this article:

Paramastya, A., 2019, NANO-SURFACTANT HUFF AND PUFF OPTIMATIZATION IN MARGINAL X FIELD USING COMMERCIAL SIMULATOR, *Scientific Contributions Oil and Gas*, 42 (2) pp, 51-57
 DOI: 10.29017/SCOG. 42.2.51-57

I. INTRODUCTION

The economic optimization of the petroleum industry is one of the many challenges that petroleum engineers face. Maximizing the economic aspect of a project involves a multitude of areas, from increasing the recovery factor to expenditure efficiency. One of the methods to improve the recovery is by using surfactant, while still considering the cost of using said surfactant.

However, a full scale EOR project has many challenges. The main reason the problems exist in a full scale EOR is mainly due to the quantities of surfactant required, capital involved to develop surface facilities, and also a longer timeframe to develop lab testing and optimization. Surfactant quantities increase dramatically moving from

small field tests to full scale EOR projects (Barnes, et al. 2018) A smaller, more feasible method is used in this study, a method that does not require high quantities of surfactant: Huff and Puff. The method only affects around a well and is considered as smaller project compared to full scale EOR.

nanoparticles (NPs) utilization as surfactant has been examined for past decades. Among the examinations, particularly Silica NPs were extensively utilized (Ahmed, et al. 2018). In this study, the utilization of Silica NPs is also used to improve the oil recovery, thus improving the economic aspect at the end of the production period.

Huff and Puff technique involves a well to be a producer as well as an injector in the same well. The technique is a cyclic process where three different

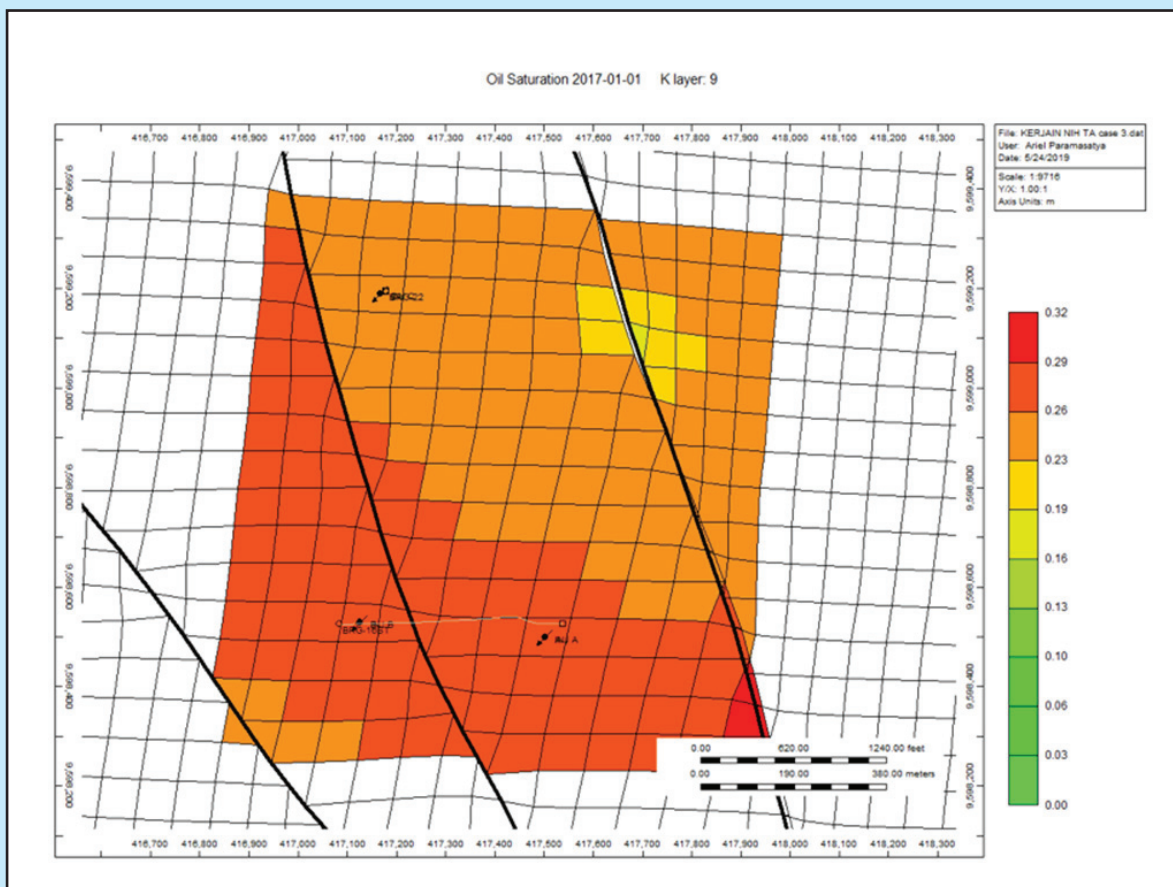


Figure 1
 Model reservoir of X field.

periods are used in every cycle: (1) injection of surfactant (Huff); (2) soaking time (where the well is shut and the surfactant is allowed to reduce the interfacial tension, hence improving the production later on); and (3) the well is re-opened, thus allowing the fluids to be produced to the surface (Puff) (Wang, et al. 2006). Using NPs as surfactant, when the well is shut during the soaking period, the NPs reduce the interfacial tension between the oil and rock. Soaking period also translates to the well being allowed to recover its pressure, giving additional energy for the well to be produced. In the production period, after the surfactant has given its effect, the oil production should increase.

The advantages of Huff and Puff method is that it only needs a single but also provides a reduction in surface facilities cost (if compared to other injection methods), making it more feasible to be applied to marginal fields.

II. DATA AND METHOD

The objective of this study is to find the optimum Huff and Puff method economically and technically. In order to find the optimum method, several sensitivity analyses were conducted: Injection schedule, injection rate, injection sequence, and economic analysis. Ultimately, the best method (the one that yields maximum profit) is chosen.

Problem limitations set in this study:

- 3 Wells of the reservoir is selected
- Surfactant concentration is 0.1 %wt,
- The Injection period (Huff) is one day,
- The Soaking period is two days,
- Total production period is limited to one year (365 days), Only one cycle of Huff and Puff conducted within the one year of production, and The economic analysis only covers the cost of nanoparticles and brine treatment.

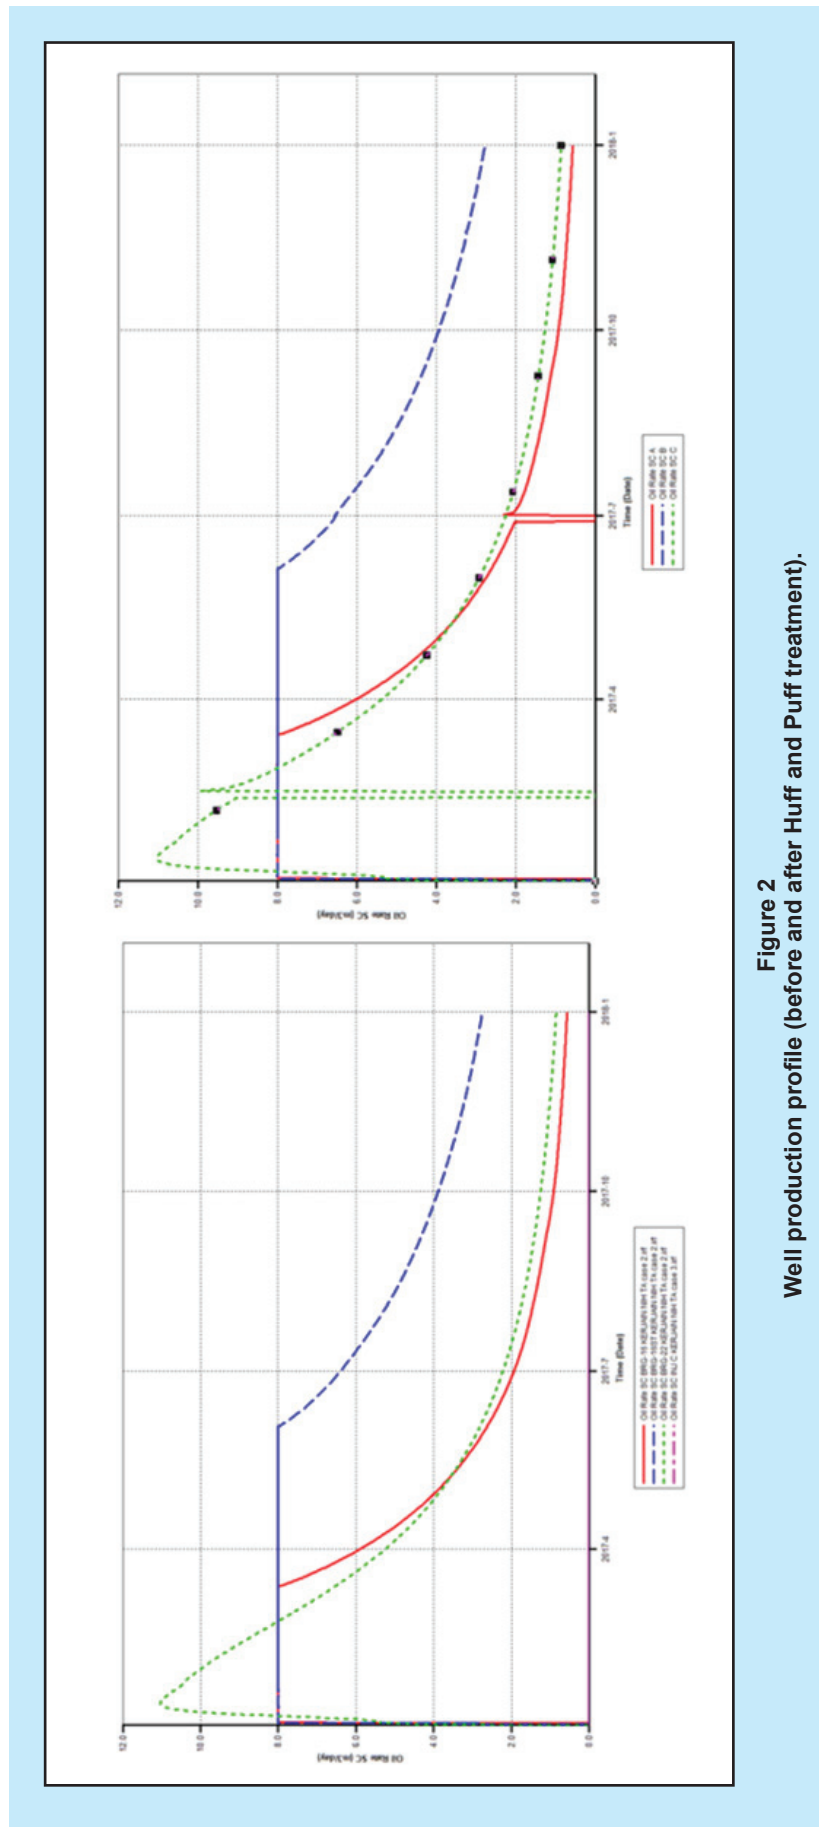


Figure 2 Well production profile (before and after Huff and Puff treatment).

A limitation worth nothing is that the concentration of which the nano-silica is diluted in brine is always 0.1 wt%. This is because this concentration, along with 0.05 wt% still remains stable, whereas 0.3 wt% was proved to be relatively unstable (Ahmed, et al. 2018).

A. Schedule Sensitivity

During the experimental period of the study, the first step is to determine the best time to do huff and puff in a specific well. The way this is done is by defining the constraints in each well manually. Two methods were used in determining the best schedule for maximum profit. The first one is to choose the best injection time that yields maximum well increment, while the second one is to choose the best injection time that generates maximum field increment. At first, the well is simulated without any kind of treatment.

The data obtained from said simulation is then used as the control data, mainly oil production rate (per well), field oil production and cumulative oil produced. From this control data, each well’s maximum flow rate is known, and when the decrease in oil production happens is also known. The data is then tabulated, and each well is experimented one by one (to decrease the amount of uncertainty in the sensitivity testing) using the same injection rate. The injection schedule is based on the decrease in each well’s oil production rate. The sensitivity of every well varies in terms of percentage consistency, due to the search for optimum injection time. The testing is further done until the results show a decrease in cumulative oil increase.

The formula that is used to calculate Incremental Oil Production is:

$$IOP_{\%} = \frac{Np - Np_0}{Np_0} \times 100 \tag{1}$$

Tabel 1
Scheduled sensitivity for well A

| Inj Rate, bbl/d | Date | Case | Field oil cum, bbl | Well Oil Cum, bbl | Field increase, bbl | Field increase, % | Well Increase, bbl | Well Increase, % |
|-----------------|------------|------|--------------------|-------------------|---------------------|-------------------|--------------------|------------------|
| 0 | - | Base | 29311.32 | 7493.14 | - | - | - | - |
| 500 | 10/21/2017 | 10% | 29307.3 | 7479.87 | -4.03 | -0.01 | -13.27 | -0.18 |
| 500 | 8/27/2017 | 15% | 29315.22 | 7521.19 | 3.9 | 0.01 | 28.05 | 0.37 |
| 500 | 7/22/2017 | 20% | 29322.83 | 7473.52 | 11.51 | 0.04 | -19.62 | -0.26 |
| 500 | 6/28/2017 | 25% | 29333.02 | 7470.25 | 21.7 | 0.07 | -22.9 | -0.31 |
| 500 | 4/30/2017 | 50% | 29331.57 | 7444.09 | 20.25 | 0.07 | -49.06 | -0.65 |
| 500 | 4/1/2017 | 75% | 29315.47 | 7419.69 | 4.15 | 0.01 | -73.47 | -0.98 |

Tabel 2
Scheduled sensitivity for well B

| Inj Rate, bbl/d | Date | Case | Field oil cum, bbl | Well Oil Cum, bbl | Field increase, bbl | Field increase, % | Well Increase, bbl | Well Increase, % |
|-----------------|------------|------|--------------------|-------------------|---------------------|-------------------|--------------------|------------------|
| 0 | - | Base | 29311.32 | 13657.61 | - | - | - | - |
| 500 | 12/26/2017 | 35% | 29269.06 | 13615.35 | -42.27 | -0.14 | -42.27 | -0.31 |
| 500 | 11/18/2017 | 40% | 29291.19 | 13636.48 | -20.13 | -0.07 | -21.13 | -0.15 |
| 500 | 9/26/2017 | 50% | 29285.16 | 13627.99 | -26.17 | -0.09 | -29.63 | -0.22 |
| 500 | 7/12/2017 | 75% | 29249.31 | 13585.97 | -62.02 | -0.21 | -71.64 | -0.52 |
| 500 | 6/16/2017 | 90% | 29237.86 | 13568.55 | -73.47 | -0.25 | -89.07 | -0.65 |

Tabel 3
Scheduled sensitivity for well C

| Inj Rate, bbl/d | Date | Case | Field oil cum, bbl | Well Oil Cum, bbl | Field increase, bbl | Field increase, % | Well Increase, bbl | Well Increase, % |
|-----------------|-----------|------|--------------------|-------------------|---------------------|-------------------|--------------------|------------------|
| 0 | - | Base | 29311.32 | 8160.5 | - | - | - | - |
| 500 | 8/12/2017 | 15% | 29327.8 | 8150.44 | 16.48 | 0.06 | -10.06 | -0.12 |
| 500 | 7/2/2017 | 20% | 29340.69 | 8144.34 | 29.37 | 0.1 | -16.17 | -0.2 |
| 500 | 6/5/2017 | 25% | 29351.82 | 8137.48 | 40.51 | 0.14 | -23.02 | -0.28 |
| 500 | 3/29/2017 | 50% | 29378.62 | 8114.78 | 67.3 | 0.23 | -45.73 | -0.56 |
| 500 | 2/21/2017 | 75% | 29405.47 | 8105.72 | 94.16 | 0.32 | -54.79 | -0.67 |
| 500 | 2/11/2017 | 85% | 29423.14 | 8113.02 | 111.84 | 0.38 | -47.49 | -0.58 |
| 500 | 2/1/2017 | 90% | 29416.16 | 8104.78 | 104.85 | 0.36 | -55.73 | -0.68 |

Tabel 4
Field schedule optimization

| Inj Rate, bbl/d | Well | Date | Case | Field increase, bbl | Field increase, % |
|-----------------|------|------------|---------------------------|---------------------|-------------------|
| 500 | A | 8/27/2017 | Best Well Increment Date | -0.629 | -0.0021 |
| | B | 11/18/2017 | | | |
| | C | 8/12/2017 | | | |
| 500 | A | 6/28/2017 | Best Field Increment Date | 112.9684 | 0.3854 |
| | B | 11/18/2017 | | | |
| | C | 2/11/2017 | | | |

- Injection Rate Sensitivity

After the optimum schedule is determined, it is then used for the rest of the study. In injection rate sensitivity, the rate of surfactant injection is varied: 50, 250, and 500 barrels per day.

- Sequence Sensitivity

Sequence sensitivity variations are NP, brine-NP, and NP-brine-NP. Note that when varying the sequence for every experimental testing, the injection period is still one day. This means, for example, in NP-brine-NP sequence, the first nano injection period is 8 hours, another 8 hours for the brine, and the last 8 hours for NP. The soaking period is maintained at two days.

- Economic Analysis

The economic analysis of this study only considers the cost of brine treatment and NP price. Injection rate sensitivity and sequence sensitivity could not be concluded as to which is the “best” because the economic aspect of the methods was not yet done. As mentioned before, the analysis only covers the price of the NP and brine treatment cost. Fortunately, because the results show the increase of money at the end of production, it is easy to further study the price of, for example, surface facilities cost and the cost of converting a well into a huff and puff well.

$$Revenue = Oil\ revenue - Brine\ Cost - surfactant\ Cost \quad (2)$$

Tabel 5
Economic analysis

| Inj Rate, bbl/d | Sequence | Total NP injected, bbl | Total Injected Brine, bbl | Field oil cum, bbl | Field increase, bbl | NP Cost, USD | Brine Cost, USD | Cash at final, USD | Cash Increment, USD |
|-----------------|-------------|------------------------|---------------------------|--------------------|---------------------|--------------|-----------------|--------------------|---------------------|
| 0 | - | 0 | 0 | 29311.32 | - | - | - | 2074362.17 | - |
| 50 | NP | 150 | 0 | 29397.92 | 86.6 | 5796.88 | 0 | 2074694.24 | 332.07 |
| 50 | Brine-NP | 75 | 75 | 29396.67 | 85.35 | 2898.44 | 7.13 | 2077496.54 | 3134.37 |
| 50 | NP-Brine-NP | 100 | 50 | 29396.67 | 85.35 | 3864.58 | 4.75 | 2076532.77 | 2170.6 |
| 250 | NP | 750 | 0 | 29408.68 | 97.36 | 28984.38 | 0 | 2052267.85 | -22094.32 |
| 250 | Brine-NP | 375 | 375 | 29404.28 | 92.96 | 14492.19 | 35.63 | 2066412.85 | -7949.32 |
| 250 | NP-Brine-NP | 500 | 250 | 29408.11 | 96.79 | 19322.92 | 23.75 | 2061865.5 | -12496.67 |
| 500 | NP | 1500 | 0 | 29424.28 | 112.96 | 57968.77 | 0 | 2024387.3 | -49974.87 |
| 500 | Brine-NP | 750 | 750 | 29426.29 | 114.97 | 28984.38 | 71.25 | 2053442.86 | -20919.31 |
| 500 | NP-Brine-NP | 1000 | 500 | 29426.35 | 115.03 | 38645.84 | 47.5 | 2043809.6 | -30552.57 |

Tabel 6
Optimized Huff and Puff method

| Inj Rate, bbl/d | Sequence | Total NP injected, bbl | Total Injected Brine, bbl | Field oil cum, bbl | Field increase, bbl | NP Cost, USD | Brine Cost, USD | Cash at final, USD | Cash Increment, USD |
|-----------------|----------|------------------------|---------------------------|--------------------|---------------------|--------------|-----------------|--------------------|---------------------|
| 50 | Brine-NP | 75 | 50 | 29436.04 | 124.72 | 2898.44 | 4.75 | 2080285 | 5923.03 |

The assumptions used in this economic analysis:

- Brine density is 1020.7 Kg/m³,
- Nanoparticle density is 2650 Kg/m³
- The price of the nanoparticle is 237.98 USD/Kg
- Oil price is 70.77 USD/barrel
- Brine treatment cost is 0.095 USD/barrel

III. RESULT AND DISCUSSION

The data required for this study is gathered from a field model that has been recalibrated by history matching. By 2017, the model has around 3 MMSTB of remaining oil in place, with 25 wells operating. 20 of them being producer wells and the other 5 being injectors. Porosity ranges from 0.05 – 0.22, and permeability ranges from 130 – 330 md.

After sensitivity for individual wells, two best schedules were found. First schedule maximizes

increment per well (table 1-3), and the other that maximizes field increment (table 4). Scheduling method is then to be determine based on those sensitivities. The best scheduling method is: well A in June 28th, well B in November 18th, and Well C in February 2nd. This optimum scheduling method does not require an economic analysis, thus can be easily concluded which is the best option because the amount of injected surfactant is the same for every case.

As for the injected rate sensitivity, the more fluid injected, the greater the oil production at the end of production time. This due to more surfactant injected means that more pore volume is affected by the surfactant allowing the interfacial tension of the rock reduce. Judging only by the incremental oil production, the injection rate that maximizes oil production is 500 barrels/day. In the injection sequence

sensitivity, the results show that the incremental oil production is maximum when using the NP-brine-NP sequence. However, the injection rate and sequence sensitivity are yet to be concluded because there is a change in the amount of fluid injected, and that contributes to a difference in cost.

The economic analysis is straightforward and doing this analysis will make the conclusion of which method maximizes profit. The results show that brine-NP injection sequence with 50 bbl/day injection rate is most profitable.

However, there is an anomaly in well B. The well experienced a decrease in oil production when treated with Huff and Puff. Interference effect may be a suspect towards this phenomenon. Rightfully so, when the Huff and Puff method is only applied in well A and C, with well B being opened all year without treatment, the cumulative oil production increased significantly.

IV. CONCLUSIONS

The conclusions for this study:

- Optimum recovery is achieved if well B is not treated.
- The optimum schedule for each well is June 28th for well A, and February 2nd for well C.
- The optimum Injection rate for the Huff and Puff method is 50 barrels/day.
- The Optimum Sequence which generates maximum profit is brine-NP sequence.
- The maximum profit generated for 1 cycle, 1-year Huff and Puff is 5923 USD.

REFERENCES

- Wang, Chunhong et al., 2006. Huff 'n' Puff Recovery Technique on Waterout Horizontal Wells. Ohio, USA: Society of Petroleum Engineers
- Barnes, J. R. et al., 2018. Deployment of Large Scale Surfactant Manufacture for EOR Projects. Oklahoma, USA: Society of Petroleum Engineers
- Doni, C. F. & Rachmat, S. 2017. Microbial Huff and Puff Optimization to Improve Oil Well Recovery Factor Using Conventional Commercial Simulator. Bandung, Indonesia: Institut Teknologi Bandung
- Sheng, J. J. 2015. Status of Surfactant EOR Technology. Texas, USA: Southwest Petroleum University
- Mashat, A. et al., 2018. Novel Nano-Surfactant Formulation to Overcome Key Drawbacks in Conventional Chemical EOR Technologies. Brisbane, Australia: Society of Petroleum Engineers
- Funston, R. et al., 2002. Evaluation of Technical and Economic Feasibility of Treating Oilfield Produced Water to Create a "New" Water Resource. California, USA: Ground Water Protection Council Conference
- Ahmed, A. et al., 2017. Development of Surface Treated Nanosilica for Wettability Alteration and Interfacial Tension Reduction. Perak, Malaysia: Universiti Teknologi PETRONAS
- Halnes, H. K. 1990. A Laboratory Study of Natural Gas Huff 'n' Puff. Calgary, Canada: Society of Petroleum Engineers
- Kutty, S. M. 2015. Well Performance Improvement Using Complex Nano Fluids. Abu Dhabi, UAE: Society of Petroleum Engineers